
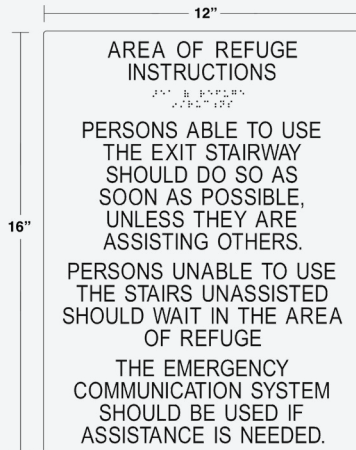
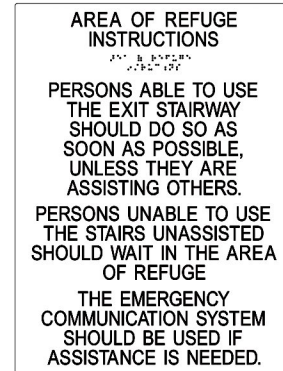


# Emergency Communication Instructions

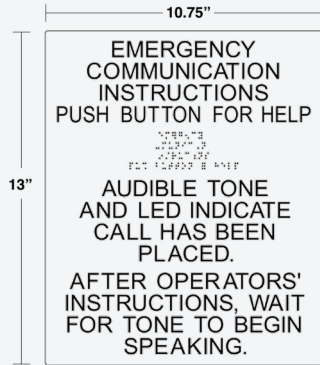

Specifically follow the guidelines in Chapter 7 Section 703 of ICC A117.1 with Instructions and compliance that are a critical part of the **Shield30 Emergency Communication System**.

## Specifications

The aluminum Emergency Communications Instructions shall be finished with a white epoxy with black graphics for high visibility and endurance. Black 1/32" raised text and braille will be designed specifically to comply with Chapter 7 Section 703.3 of ICC A117.1. Sign shall be mounted above or adjacent to each emergency call station per IBC Section 1009.11. Mounting the sign: visual characters shall be 40 inches (1015 mm) minimum and a maximum of 60 inches (1524 mm) above the finish floor or ground.

## Ordering Information

P/N#	Description
SESIGN1	10.75" x 13" Emergency Communications Instructions
SDSIGN1	12" x 16" Area of Refuge Instructions



## Features

- .040" aluminum sign with white epoxy finish
- 1/32" raised text and braille designed specifically for Chapter 7 Section 703.3 of ICC A117.1
- Required per IBC 1009.11 3 and NFPA72 2016 24.10.8
- High strength foam adhesive for easy installation