

## Features

- The only 'Cloud Chamber' based Air Sampling Fire Detector available
- Resistant to unwanted alarms from dust, humidity & temperature changes
- Programmable 'Pre-alarm' warning
- 3 x Programmable 'Fire' alarm warnings (Fire 1, Fire 2 & Fire 3)
- Widest sensitivity range
- Full Airflow Monitoring
- 7" full colour multi-function touch screen LCD display
- Live camera stream from up to 6 IP color cameras
- In-built IP interface

## Description

The 'sensitivity range' is the key feature that makes the Cirrus CCD Series Fire Detector a most versatile fire detection device.

For over 30 years Cloud Chamber detectors have been known as the most sensitive fire detection device, able to detect at the true incipient stage of a developing fire.

The New Cirrus CCD Detectors have a vast sensitivity range capable of being even more sensitive than previous versions.


Cirrus CCD detectors can be installed in dusty, humid and high & low temperature applications. In these harsh environment applications design and installation consideration must be given to the complete installation to ensure the sampling pipes, sampling holes and detector remain operational.



GOLD MEDAL OF THE POZNAN INTERNATIONAL FAIR SECUREX FOR INNOVATION AND SUPERIOR TECHNOLOGY



## Connections

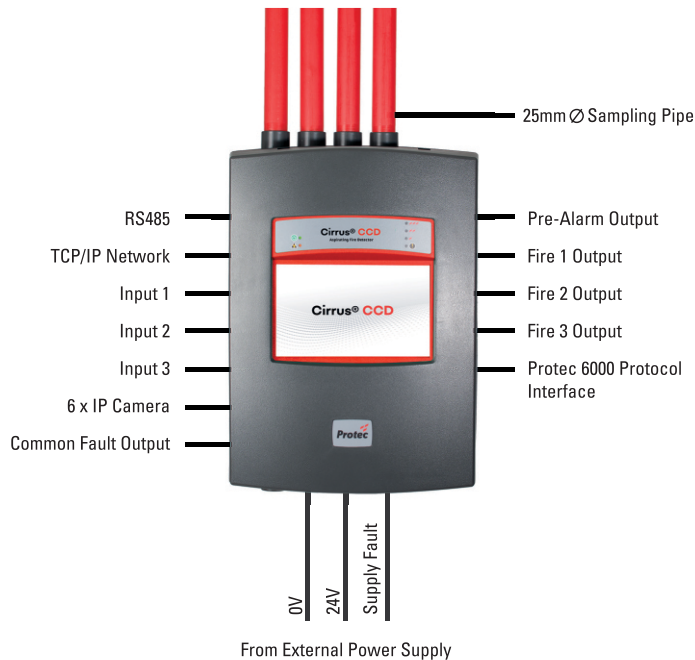

<b>Supply Voltage</b>	20 - 29VDC	<b>Pipe ID</b>	19mm to 25mm (preferred OD 25mm)
<b>Power Consumption</b>	16.8 watts quiescent (24VDC 100% Fan Speed)	<b>Alarm Indications</b>	Pre-alarm, Fire 1, Fire 2, Fire 3
<b>Current Consumption</b>	500mA with blower @ 30% 700mA with blower @ 100%	<b>Other Indications</b>	Supply Healthy, General Fault
<b>Operating Conditions</b>		<b>Sensitivity Range</b>	10,000 PCC to 10 million PCC
<b>Detector Ambient Tested to</b>	0°C to 38°C (32°F to 100°F)	<b>Programmable Inputs</b>	3 monitored inputs that may be configured for Isolate, Reset, Silence, Day/Night, Battery Fault and Mains Fault
<b>Sampled Air</b>	0°C to 55°C (32°F to 131°F)	<b>Programmable Output Relays</b>	5 Relays rated 1A @ 30VDC (Volt-free change over contacts)
<b>Humidity</b>	-20°C to 60°C (-4°F to 140°F)	<b>Camera Inputs</b>	6 x Protec specified IP cameras
<b>IP Rating</b>	10 - 95%RH, non-condensing	<b>Event Log / Data Retention</b>	24,000 events stored on FIFO basis (alarms, actions, faults and data points) (Approx 30 day historical graph data)
<b>IP Rating</b>	IP30	<b>Variable Sensitivity Settings</b>	7 day programmable settings with 2 time zones per day. Day-time/Night-time setting
<b>Cable Access</b>	10 x 20mm knock outs	<b>Airflow Monitoring</b>	'High Airflow' and 'Low Airflow' fault monitoring.
<b>Cable Termination</b>	Screw terminal blocks (0.2 - 2.5mm <sup>2</sup> , 30 - 12AWG)	<b>Weight</b>	3.5kg (7.7lbs)
<b>Sampling Network</b>	Four inlet ports with combined sampling pipe length up to 630m (2,066ft) all sampling pipe operational parameters to be verified using 'ProFlow' sampling pipe calculation program. Maximum transport time = 120 seconds.	<b>Dimensions (mm)</b>	380(H) x 250(W) x 137(D)